
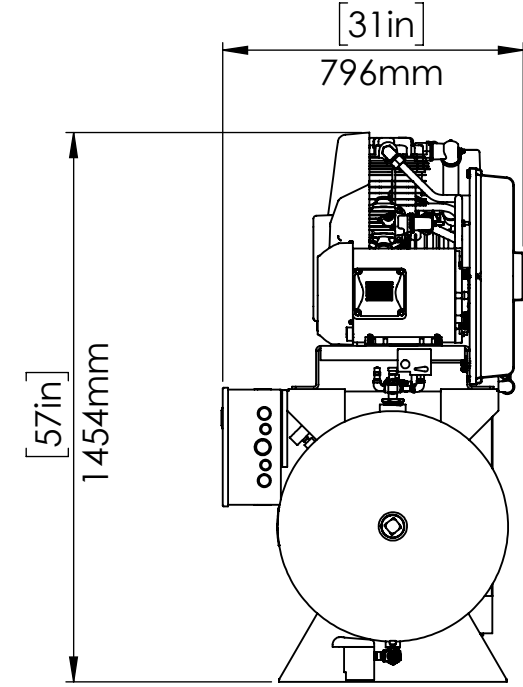


	OFT-10(H)-FM-120
HORSEPOWER	10
OPERATING PRESSURE (PSI)	90-120
AIR DELIVERY (CFM)	27.2
CONTROL SYSTEM	MULTIPLE UNIT CONTROL AUTO/START STOP
NOISE LEVEL (dB A)	59
AIR OUTLET (BALL VALVE)	3/4" NPT
OPERATING VOLTAGE	1 PHASE, 115/208-230V, 60Hz 3 PHASE, 208-230/460V, 60Hz
DIMENSIONS (L x W x H)	75" x 31" x 57"
APPROX. WT. (LBS.)	800

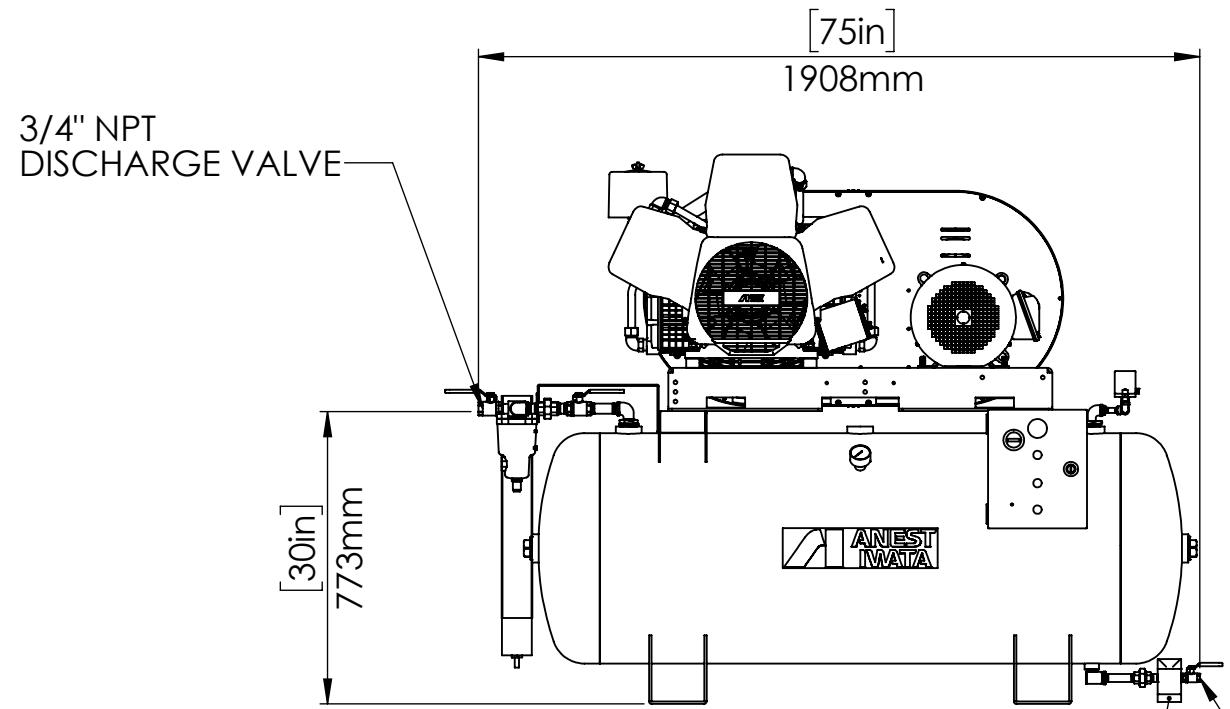

1/4" NPT DRAIN VALVE
G 1/4", Ø8-10mm
AUTO DRAIN CONNECTION

- NOTES:**
- 1) COMPRESSOR UNIT MUST BE INSTALLED IN A ROOM ON A FLAT FLOOR
 - 2) COMPRESSOR IS AN AIR COOLED UNIT - ROOM TEMPERATURE MUST NOT EXCEED 104° F
EXHAUST DUCTS OR VENTILATING FAN MUST BE INSTALLED IF ROOM TEMPERATURE EXCEEDS 104° F
 - 3) PROVIDE ADEQUATE SPACE DURING INSTALLATION FOR NECESSARY MAINTENANCE AND REPAIRS
ALLOW A MINIMUM OF 20" ON EACH SIDE AND 24" FROM TOP OF UNIT FROM WALLS
 - 4) CARE MUST BE TAKEN TO INSURE COMPRESSOR UNIT DOES NOT INTAKE HOT AIR OR DUST
 - 5) REFER TO INSTRUCTION MANUAL FOR ELECTRIC WIRING DIAGRAM
 - 6) SPEC IS SUBJECT TO CHANGE WITHOUT NOTICE

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ANEST IWATA. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ANEST IWATA IS PROHIBITED.

DIMENSIONS ARE IN INCHES	DRAWN	NAME	DATE
	CHECKED	SDR	4/21/20
	ENG APPR.	AMM	4/22/20
	MFG APPR.		
	Q.A.		
MATERIAL	COMMENTS:		
ASSY			
PART NO.			
DO NOT SCALE DRAWING			

ANEST IWATA
Air Engineering Inc. 

TITLE: OFT-10(H)-FM-120
OIL-FREE PISTON UNIT
TANK MOUNT COMPRESSOR
FILTER MEMBRANE DRYER

SIZE	DWG. NO.	REV
B	OFT-10(H)-FM-120-R1	1

SCALE: 1:20 WEIGHT: SHEET 1 OF 1