
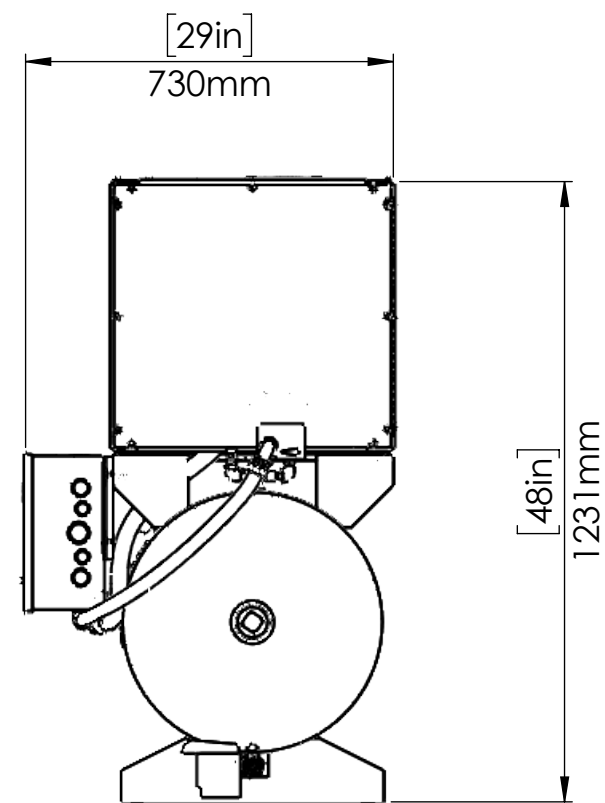



	SLTE-5-60	SLTE-5H-60
HORSEPOWER	5	5
OPERATING PRESSURE (PSI)	85-115	115-145
AIR DELIVERY (CFM)	14.8	11.7
CONTROL SYSTEM	MULTIPLE UNIT CONTROL - AUTO/START STOP	
NOISE LEVEL (dB A)	61	
AIR OUTLET (BALL VALVE)	1/2" NPT	
OPERATING VOLTAGE	3 PHASE, 208-230/460V, 60 Hz	
DIMENSIONS (L x W x H)	49 x 29" x 48"	
APPROX. WT. (LBS.)	455	

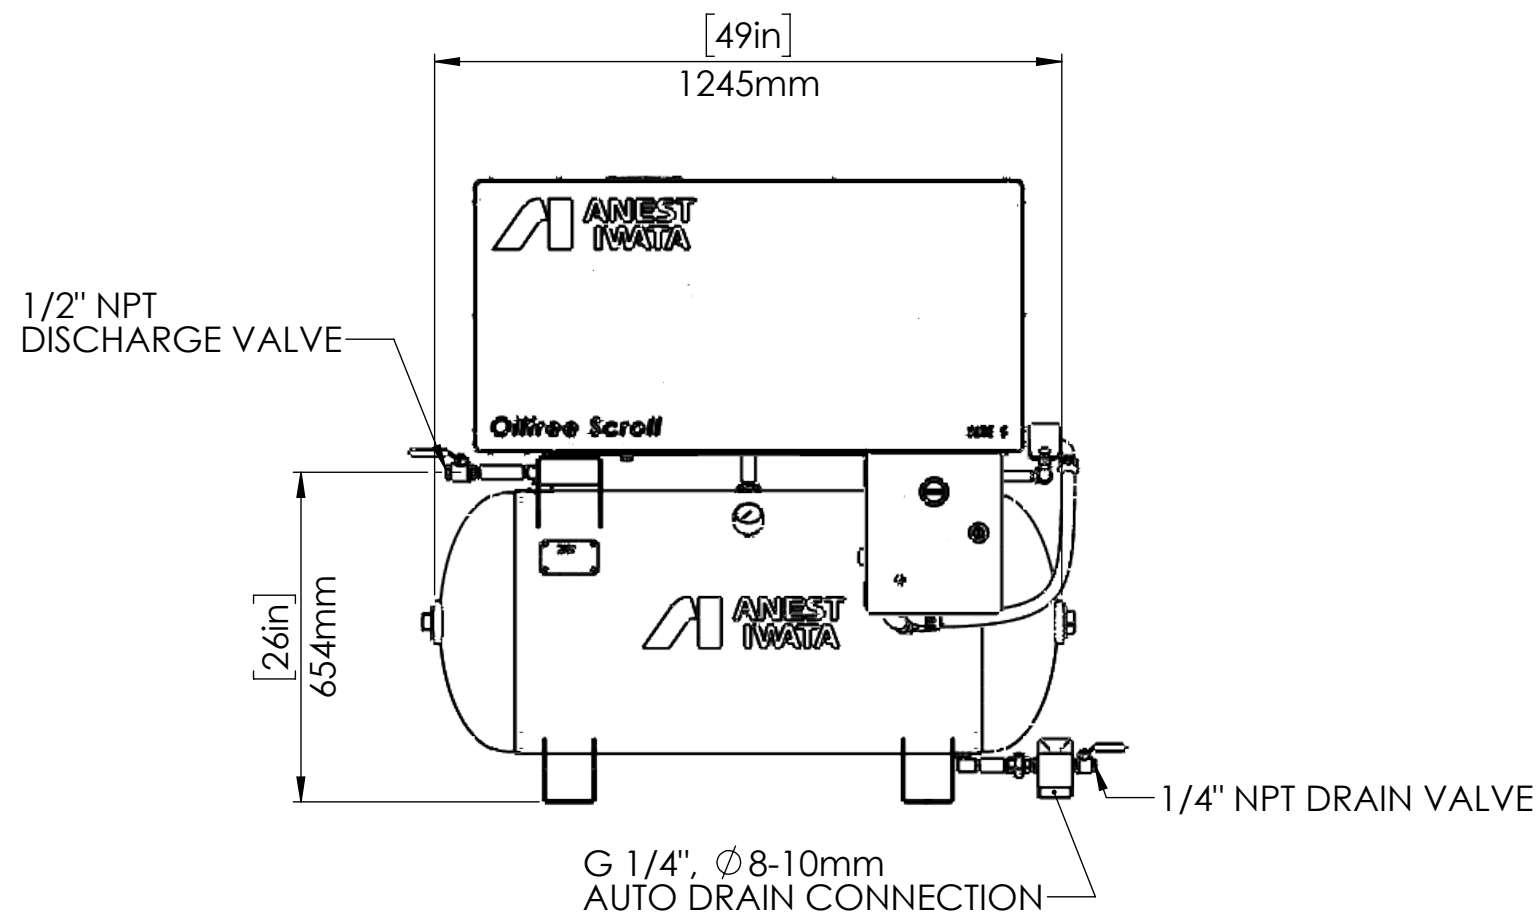

- NOTES:
- 1) COMPRESSOR UNIT MUST BE INSTALLED IN A ROOM ON A FLAT FLOOR
  - 2) COMPRESSOR IS AN AIR COOLED UNIT - ROOM TEMPERATURE MUST NOT EXCEED 104° F EXHAUST DUCTS OR VENTILATING FAN MUST BE INSTALLED IF ROOM TEMPERATURE EXCEEDS 104° F
  - 3) PROVIDE ADEQUATE SPACE DURING INSTALLATION FOR NECESSARY MAINTENANCE AND REPAIRS ALLOW A MINIMUM OF 20" ON EACH SIDE AND 24" FROM TOP OF UNIT FROM WALLS
  - 4) CARE MUST BE TAKEN TO INSURE COMPRESSOR UNIT DOES NOT INTAKE HOT AIR OR DUST
  - 5) REFER TO INSTRUCTION MANUAL FOR ELECTRIC WIRING DIAGRAM
  - 6) SPEC IS SUBJECT TO CHANGE WITHOUT NOTICE

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ANEST IWATA. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ANEST IWATA IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	ANEST IWATA Air Engineering Inc. 	
DIMENSIONS ARE SHOWN IN INCHES AND MILLIMETERS		DRAWN	AGH		4/9/20
		CHECKED	AMM		4/14/20
		ENG APPR.			
		MFG APPR.			
		Q.A.			
		COMMENTS:		<b>TITLE:</b> <b>SLTE-5(H)-60</b> OIL-FREE SCROLL UNIT TANK MOUNT COMPRESSOR	
MATERIAL	ASS'Y	SIZE	DWG. NO.		REV
PART NO.		<b>B</b>	SLTE-5(H)-60-R2		<b>2</b>
DO NOT SCALE DRAWING		SCALE: 1:15 WEIGHT:		SHEET 1 OF 1	